

Micro Flooter accessory spotlight for engine guard

KAWASAKI KLR 650
US-Model from 2008

Item-No.: 730.206 black

Side cases
Top cases
luggage frames
Lock it system
Softbags
Aluminium luggage
Leather luggage
Protection bars
Center stands
Chopper parts
Accessories




Assembling instructions

The kit includes the following parts:

Quant	item no.	description			
1	151.160	Micro Flooter accessory spotlight set: 1x spotlight right (151.162) 1x spotlight left (151.161)	1	300.308	quick connector for cable
			4	150.937	filister head screw M6 x16
			8	150.809	washer ø6,4
			4	150.799	self lock nuts M6
			4	150.704	cap for nuts M6
			10	270.115	cable ties
1	701.526HB	switch and wire harness	2	300.307	tubing á 60 cm

For fastening the Micro-Flooter you need the Hepco & Becker engine guard item-no.: 502.206 00 01 !

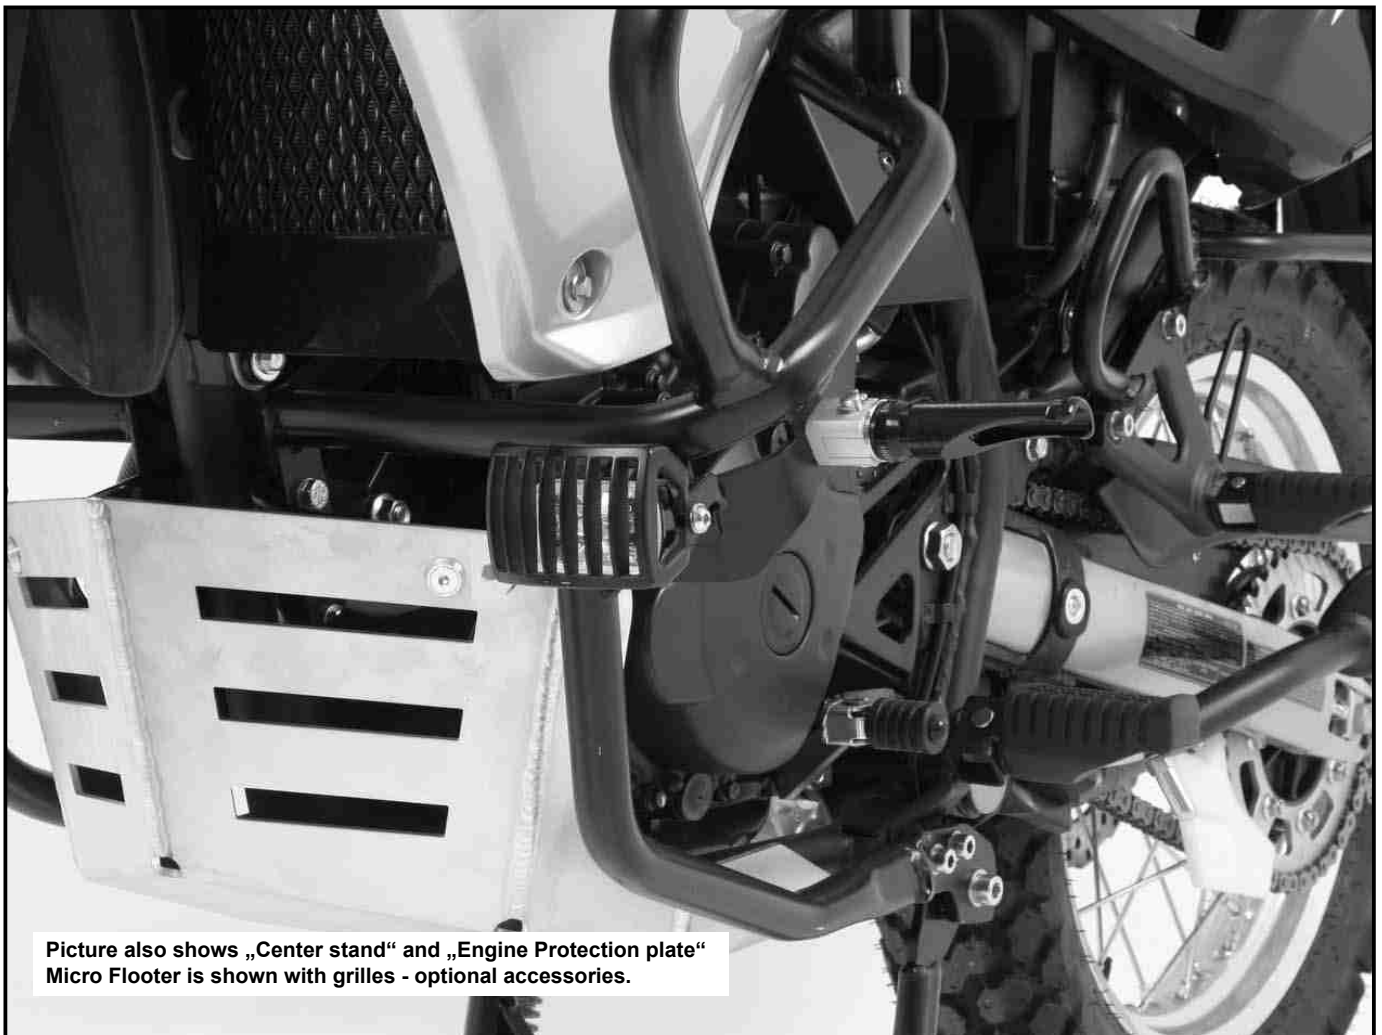

Picture also shows „Center stand“ and „Engine Protection plate“
Micro Flooter is shown with grilles - optional accessories.

Micro Flooter accessory spotlight for engine guard

KAWASAKI KLR 650
US-Model from 2008

Item-No.: 730.206 black


Side cases
Top cases
luggage frames
Lock it system
Softbags
Aluminium luggage
Leather luggage
Protection bars
Center stands
Chopper parts
Quad parts
Accessories



Assembling instructions

Overview wire harness:

- 1** to the positive battery lead
- 2** to the negative battery lead
- 3** relay
- 4** switch
- 5** cable to the parking light
- 6** cable to the micro-flooters
- A** connection point

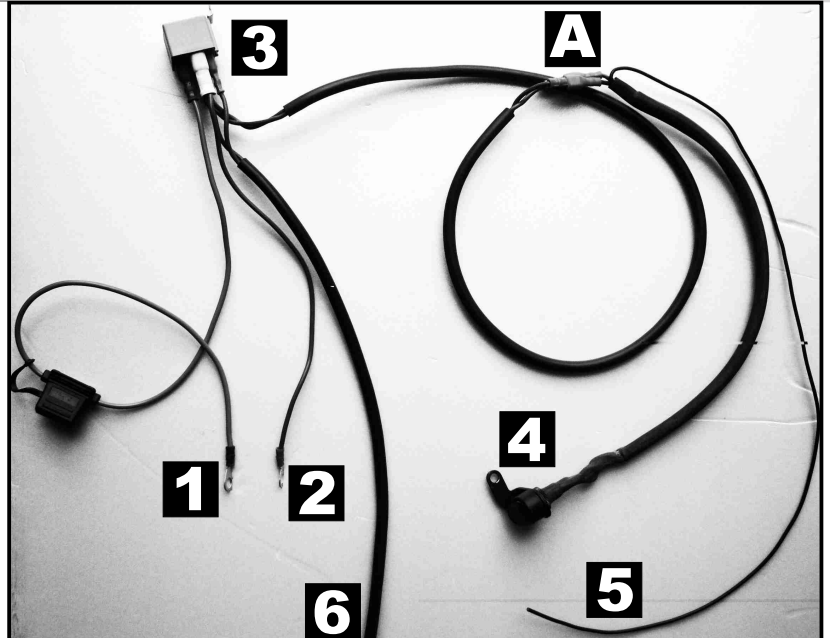

Fastening of the driving lights:
with filister head screws M6x16, washers
ø6,4.
Notice correct position:
cable at the inner side



1



Luggage ideas.

2

Micro Flooter accessory spotlight for engine guard

KAWASAKI KLR 650
US-Model from 2008

Item-No.: 730.206 black

Side cases
Top cases
luggage frames
Lock it system
Softbags
Aluminium luggage
Leather luggage
Protection bars
Center stands
Chopper parts
Quad parts
Accessories




Assembling instructions

Fastening of the switch:
Disconnect the wire harness at point **A**

Choose a possible point to install the supplied driving light switch using the original screw, for example at the brake fluid container fixing. The black wire at the driving light switch is attached to the parking light wire by a quick connector.

2

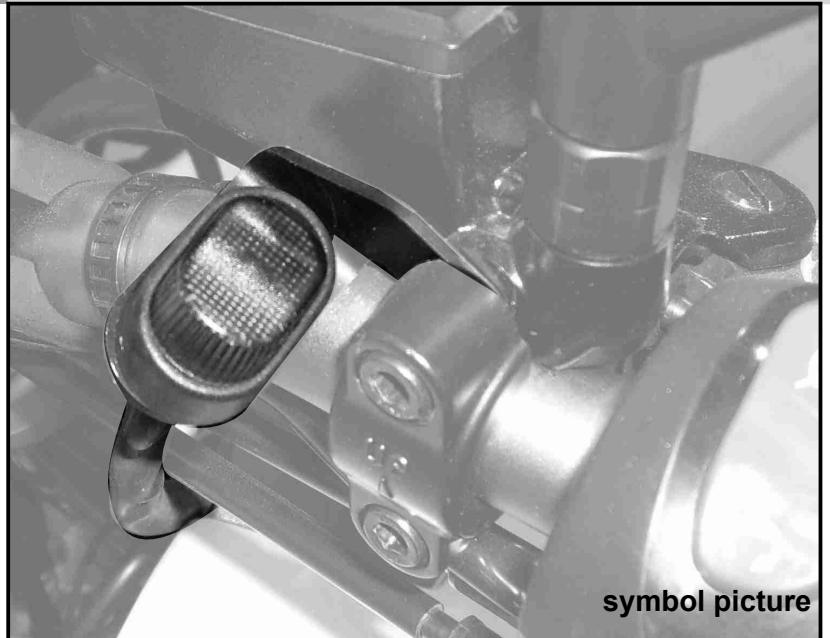

symbol picture


Preparing:
Unmount side- and frontcover and disconnect the battery.

Connect the red wire **1** from the relay to the positive battery lead and the brown wire **2** to the negative lead.

Wire tie the relay **3** like in the picture and neatly wire tie all cables in place.

Connect the cable to the switch again with the wire harness. **A**
Connect battery.

3

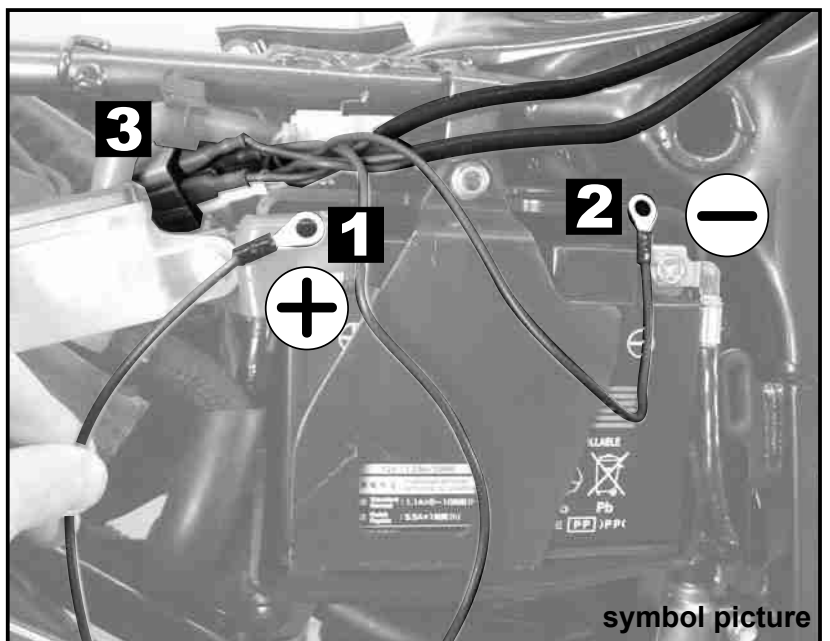

symbol picture

Luggage ideas.

3